



## ENDLESS Beauty

600x1200mm GVT | PGVT 2022 COLLECTION

#### **OUR BRAND STORY**

Savino is a reputed, and leading manufacturer & supplier of glazed porcelain tiles and polished glazed vitrified tiles in India, with its headquarters located in the ceramic hub of India – Morbi.Following the remarkable success of Savino Ceramic in a concise time, we have set up a new series of production of 600x1200mm size – Savino accelerates our production and meets the growing demand.With its worldwide presence, cutting-edge modern technology, multilayer distribution network, quality products, and skilled human resources, Savino has successfully established itself as one of the India's most reliable porcelain tiles manufacturers.

#### **VISION-MISSION**

Savino strives to become a pioneer, developing innovative new age surfaces to meet our customers' most challenging demands.To provide opportunities for the material and intellectual growth of all our employees, and through our joint efforts, contribute to the advancement of society and humankind.



#### Made in India

Each product we manufacture is conceived and produced entirely in India with a refined design and a particular care to make the room area unique and special. Savino is an ever-evolving company with a look at the future and a continuous innovation for increasing improvement through quality and care that characterized our production. The "Made in India" value can easily be seen through the wide range of high quality products which are conceived with a unique design that combines elegance, comfort and functionality. ALL BURGESSER STREET

**SIII**[8]

Ø111183





### APPLICATION



RESIDENCES

計

AIRPORTS



GARDEN & POOLS



MALLS



HOTELS

M III



OFFICES

RAILWAY

**STATIONS** 



RESTAURANTS



SHOPS



SPACES PUBLIC





BATHROOMS




**KITCHENS** 







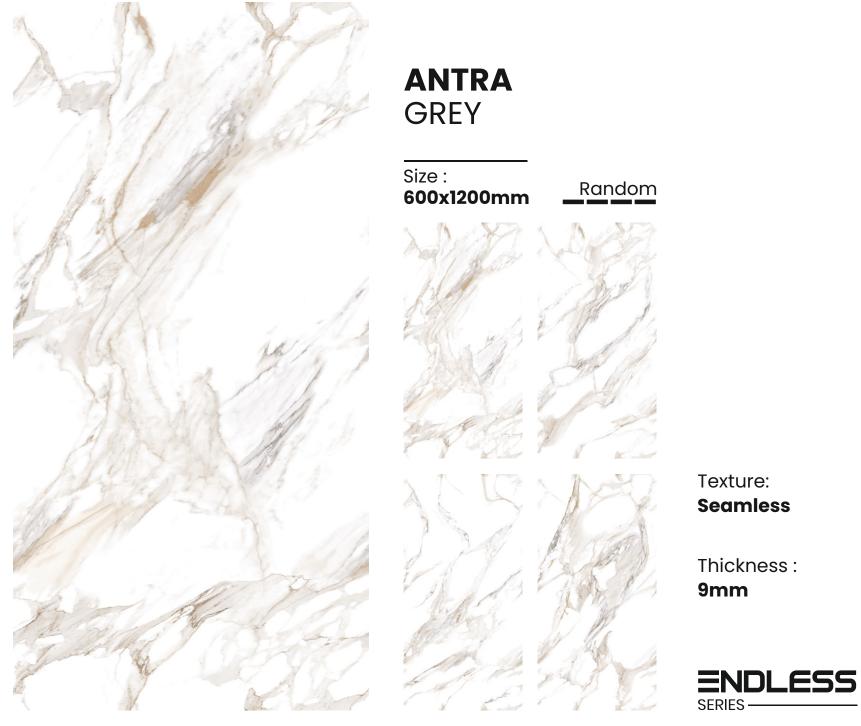





**ANTARCTIC** 

Random

Texture: Seamless

Thickness : 9mm









Texture: **Seamless** 

Thickness : 9mm









#### **BELLARUS** WHITE




Texture: **Seamless** 

Thickness : 9mm





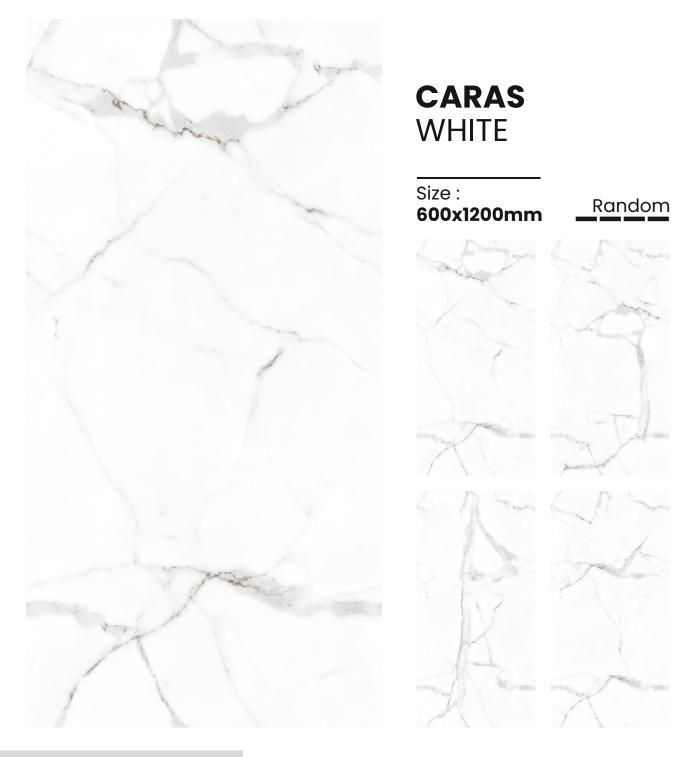

Texture: **Seamless** 

Thickness : 9mm









#### **DAINESTY** BROWN

Size : 600x1200mm

Random




Texture: **Seamless** 

Thickness : **9mm** 





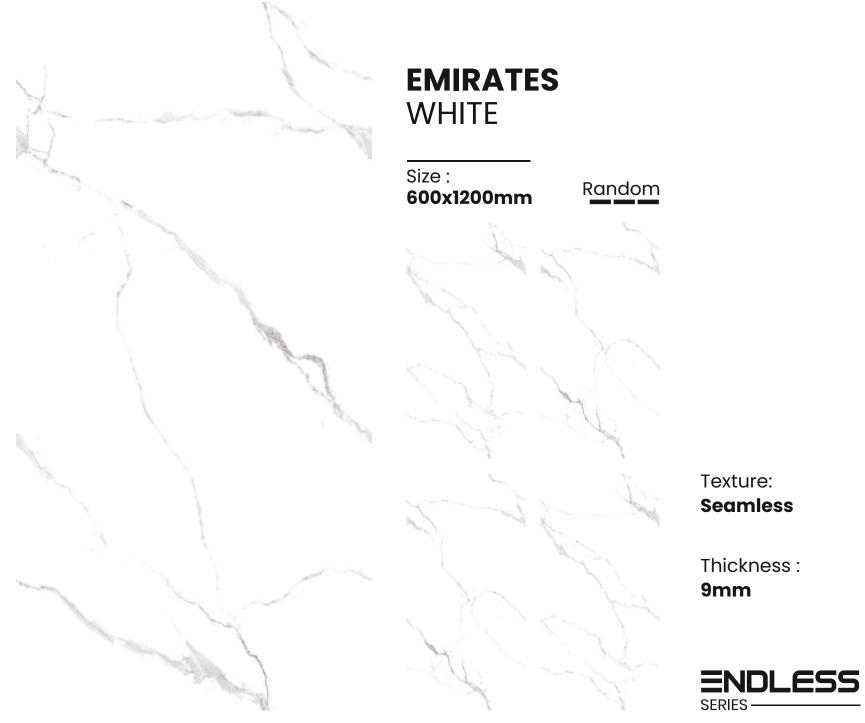





#### FORTUNE BEIGE

Size : 600x1200mm

Random






Texture: **Seamless** 

Thickness : 9mm





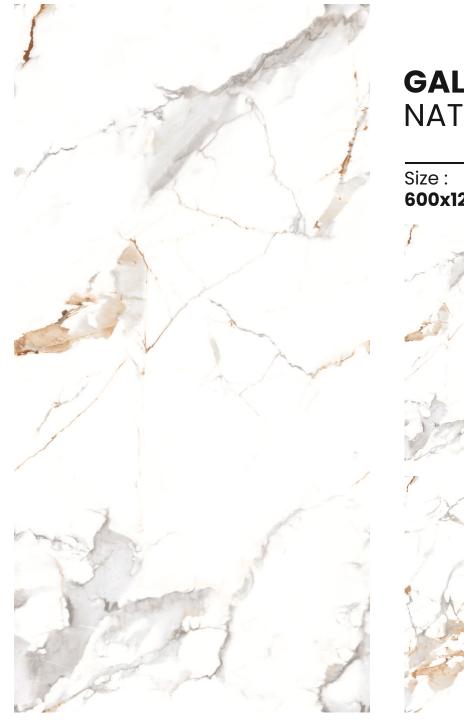

#### **GALLOPS** NATURAL



Texture: **Seamless** 

Thickness : **9mm** 










#### **GRAPHITE** GREEN

Size : 600x1200mm

Random





Texture: **Seamless** 

Thickness : 9mm









**NIPPON** 

Texture: **Seamless** 

Thickness : 9mm







#### **OMEGA** NATURAL

Size : 600x1200mm

Random





Texture: **Seamless** 

Thickness : 9mm







#### RUFF SAND BEIGE



Texture: **Seamless** 

Thickness : 9mm









#### **SATUARIO** SPIDER



Texture: **Seamless** 

Thickness : 9mm







#### **SCRUBBY** LATTE

Size :



Texture: Seamless

Thickness : 9mm







#### **SEGESTA** GREY





Thickness : **9mm** 







# CREMA Size : Random 600x1200mm

**STAIN** 

Texture: **Seamless** 

Thickness : 9mm









#### **STENO** GREEN



Texture: **Seamless** 

Thickness : **9mm** 







#### SUNLIGHT SILVER

Size : Random



Texture: **Seamless** 

Thickness : 9mm







#### **VANNILA** BEIGE

Size : 600x1200mm

Random





Texture: **Seamless** 

Thickness : 9mm







#### **VELVAT** BROWN

Size : 600x1200mm

Random





Texture: **Seamless** 

Thickness : **9mm** 









#### VINTAGE IRON



Random



Texture: **Seamless** 

Thickness : 9mm



#### **TECHNICAL** SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO13006:2018/ EN14411 Gr.Bla	MEAN VALUE OF SAVINO	TEST METHOD
Regulatory Properties			
Deviation in Length and Width	± 0.30 % (±1.00mm)	± 0.10 %	ISO 10545-2
Deviation in Thickness	± 5.00 % (±0.50mm)	± 4.00 %	ISO 10545-2
Straightness in Side	± 0.30 % (±0.80mm)	± 0.10 %	ISO 10545-2
Rectangularity	± 0.30 % (±1.50mm)	± 0.10%	ISO 10545-2
Surface Flatness Central Curvature	± 0.40 % (±1.80mm)	± 0.20 %	ISO 10545-2
Surface Flatness Edge Curvature	± 0.40 % (±1.80mm)	± 0.20 %	ISO 10545-2
Surface Flatness Warpage	± 0.40 % (±1.80mm)	± 0.10 %	ISO 10545-2
Surface Quality	>95% defects free	>95% defects free	ISO 10545-2
Small Color Difference(for Plain Colour)	∆E <1.00	∆E < 0.30	ISO 10545-16
Glossiness ( Polished)	as per mfg.	Gloss Value >90	Gloss Meter 60
Glossiness (Matt)	as per mfg.	3< Gloss Value <7	Gloss Meter 60
Glossiness (Satin/Posh)	as per mfg.	7< Gloss Value <18	Gloss Meter 60
Structural Properties			
Water absorption	≤0.50 %	≤0.060 %	ISO 10545-3
Bulk density	as per mfg.	Min. 2.28 g/cc	ISO 10545-3
Massive Mechanical Properties			
Modulus of rupture	Min. 35.0 N/mm <sup>2</sup>	Min. 42.0 N/mm <sup>2</sup>	ISO 10545-4
Breaking strength thickness <7.5	Min. 700.0 N	Min. 1000.0 N	ISO 10545-4
Breaking strength thickness ≥7.5	Min. 1300.0 N	Min. 1800.0 N	ISO 10545-4
Breaking strength thickness ≥7.5(15mm)	Min. 1300.0 N	Min. 7500.0 N	ISO 10545-4
Surface Mechanical Properties			
MOH'S hardness #	as per mfg.	Polished Min. 4*/ Satin, Posh & Matt Min. 6	BS EN 15771
Surface abrasion resistance #	as per mfg.	Polished Min. 2 / Satin & Posh Min. 3 / Matt Min. 4	ISO 10545-7
Deep abrasion resistance #	Max. 175mm <sup>3</sup>	Max. 132mm <sup>3</sup>	ISO 10545-6
Thermal Hydrometric Properties			
Moisture expansion	Max. 0.06%(0.6mm/m)	Max. 0.02mm/m	ISO 10545-10
Thermal expansion(COE) at 100°C	as per mfg.	Max. 6.0 x 10 <sup>-6</sup>	ISO 10545-8
Thermal shock resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Impact resistance(COR) #	Min. 0.55	Min. 0.55	ISO 10545-5
Frost resistance	as per mfg.	Frost Proof	ISO 10545-12
Chemical Properties			
Resistance to staining glazed	Min. Class 3	Min. Class 4	ISO 10545-14
Resistance to household chemicals & swimming pool salts glazed	Min. Class GB	Min. Class GA	ISO 10545-13
Resistance to low concentrate acid and alkalis glazed	as per mfg.	Min. Class GLA**	ISO 10545-13
Resistance to high concentrate acid and alkalis glazed	as per mfg.	Min. Class GHB**	ISO 10545-13
Safety Properties			
Skid resistance(DCOF-DRY) ##	as per mfg.	Glossy P0(<12) / Posh ≥P1(12-24) / Matt ≥P2(25-34)	BS 7976-2
Slip resistance(DCOF)( R value) ##	as per mfg.	R9 to R13	DIN 51130
Fire resistance	as per mfg.	Fire Proof	N.A.

#### **PACKING** DETAILS

PRODUCT	SIZE	THICKNESS	TILES / BOX
GLAZED PORCELAIN TILE	600x1200mm / 24''x 48 INCH	9mm	2 pcs.



#### SAVINO GRANITO PVT. LTD.

Opp. G.E.B. Sub Station, Jetpar Rd, Behind Telephone Exchange, At. Rangpar, Gujarat-363642, INDIA

Contact : +91 99134 91000, +91 99130 84000 | Mail : savinogranito@gmail.com Follow us on / f @ 🖸